

Birdy Front Suspension Installation Instruction

(Please wear gloves to maintain the product integrity of the frame and the suspension during assembling.)

The display for complete installation.



The product as following,

- A** Universal connection mechanism (Connect the frame and the suspension system.)
- B** Washer (Adjust the interval between the frame tolerance and **A**.)
- C** Spring suspension body
- D** Assembling tool




- 1** Connect **A B** part to the frame, and use hex wrench to fix on the frame.
PS. Increase or decrease the quantity of **B** to adjust the suitable interval.



- 2** Rotate clockwise **C** spring body and fix on **A** body.
PS. Confirm whether universal function works normally.



- 3** Use **C** tool to fix **D** spring body by counterclockwise rotation.

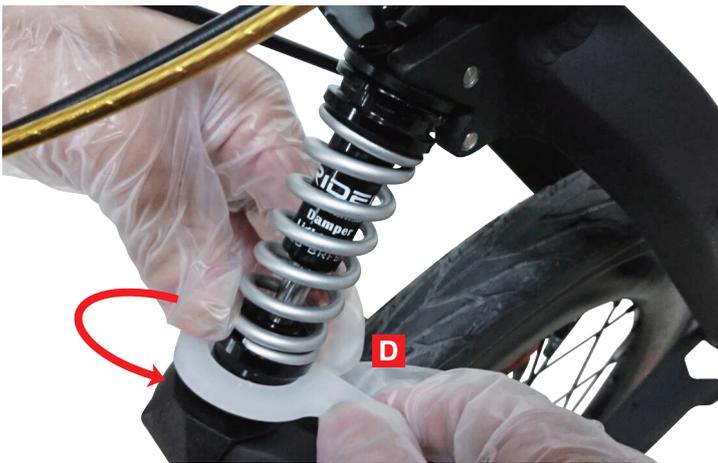

- 4** Adjust the interval to the best position according original adjusting instruction of front hanger.

